

GUIDANCE NOTES FOR ALTON DWARF WALL GREENHOUSES.

FOOTINGS

CONCRETE STRIP FOOTINGS SHOULD BE A MINIMUM OF 400mm WIDE x 200mm DEEP. IF THE SITE IS ON MADE UP GROUND IT IS IMPORTANT THAT THE FOOTINGS ARE CUT INTO THE COMPACTED GROUND BELOW. WHERE THE GROUND IS LIABLE TO MOVEMENT SUCH AS HEAVY CLAY OR LOOSE SANDY SOIL REINFORCING SHOULD BE ADDED TO THE CONCRETE FOOTINGS.

WALLS

IT IS MOST IMPORTANT THAT THE BRICKWORK IS IN ACCORDANCE WITH THE DIMENSIONS PROVIDED AND IS SQUARE, LEVEL AND UPRIGHT. THE DIAGONAL MEASUREMENTS MUST BE EQUAL.


THE TOP COURSE OF BRICKS SHOULD BE LAID FROG DOWN.

BRICKS SHOULD BE A GOOD QUALITY STOCK BRICK, SAND FACED FLETTON TYPE BRICKS ARE NOT SUITABLE.

IF ENGINEERING BRICKS ARE USED FOR THE TOP COURSE PLEASE ENSURE THEY ARE SOLID NOT CELLULAR (WITH HOLES THROUGH THEM) OR FIXING DOWN OF THE GREENHOUSE WILL BE A PROBLEM.


GABLE DOOR OPENING

THE OPENING FOR THE DOORWAY IS 857mm AND THE HEIGHT TO THE TOP OF THE WALL IS 675mm ABOVE THE THRESHOLD LEVEL. THE ACCURACY OF THESE MEASUREMENTS ARE MOST IMPORTANT. CONSIDERATION SHOULD BE GIVEN FOR THE INCLUSION OF AIR BRICKS WITH CONTROL UNITS WITHIN THE BRICKWORK DWARF WALL.

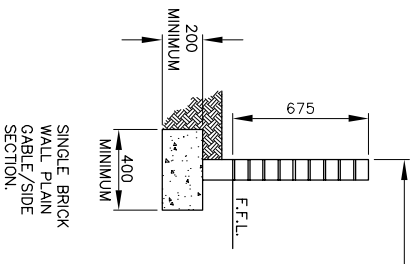

OVER ALL LENGTH 'L' = BASIC GREENHOUSE LENGTH + EXTENSION IF REQUIRED			
MODEL REFERENCE	BASIC GREENHOUSE LENGTHS	EXTENSION REFERENCE	GREENHOUSE EXTENSION LENGTHS
05	1570mm	05	1537mm
08	2348mm		
10	3107mm		
13	3885mm		

THIS PLAN APPLIES TO GREENHOUSES WITH DOORS AT ONE END ONLY.

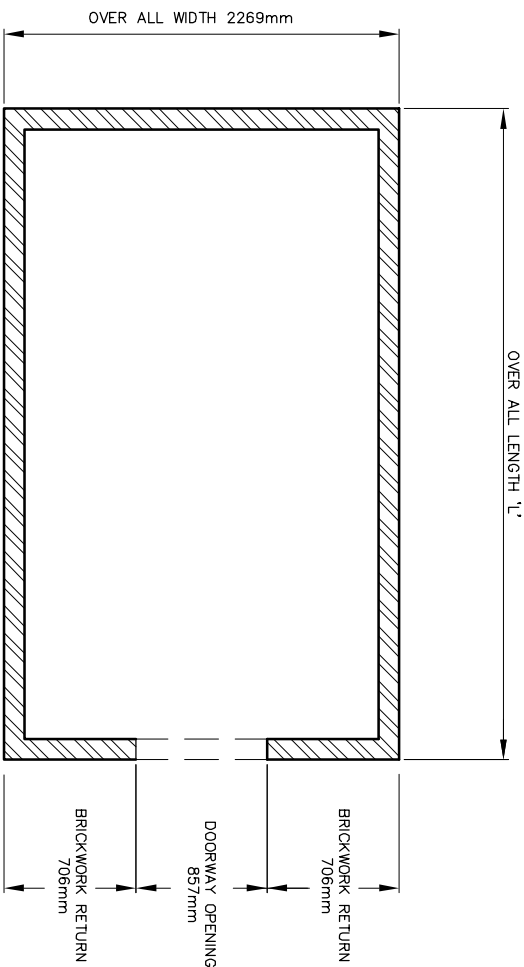

GREENHOUSES

STATION WORKS, FENNY COMPTON
WARWICKSHIRE. CV47 2XB

PRODUCT	ALTON		DRAWN BY	MJH	SCALE	N.T.S.
DESCRIPTION	DWARF WALLS FOR 7'7" TRAD GREENHOUSES.		CHECKED		DATE	MAR 2006
	ISSUE	1	LIBRARY No.			

ALT/DW-1